


CONDUIT SYSTEMS





Conduit System

DECODUCT Conduits are manufactured from super high impact uPVC compound suitable to withstand harsh environments. Conduits can be bent with the use of a bending spring.

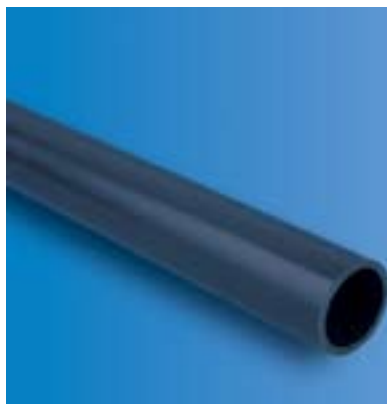


HEAVY GRADE ROUND CONDUIT-1250N COMPRESSION FORCE

Item code	Nominal Size	Minimum Inside	Standard packs		Bulk packs
	(O.D.) mm	Diameter mm	Pcs	Mtrs	Pcs
DCV 1	16	12.4	50	145	-
DCV 2	20	16.0	20	58	5000
DCV 3	25	20.7	20	58	3200
DCV 4	32	26.5	10	29	1800
DCV 5	38	32.5	10	29	1300
DCV 6	50	43.0	10	29	720




MEDIUM GRADE ROUND CONDUIT-750N COMPRESSION FORCE

Item code	Nominal Size	Minimum Inside	Standard packs		Bulk packs
	(O.D.) mm	Diameter mm	Pcs	Mtrs	Pcs
DCH 1	16	12.8	50	145	-
DCH 2	20	16.5	20	58	5000
DCH 3	25	20.9	20	58	3200
DCH 4	32	27.3	10	29	1800
DCH 5	38	33.1	10	29	1300
DCH 6	50	44.4	10	29	720

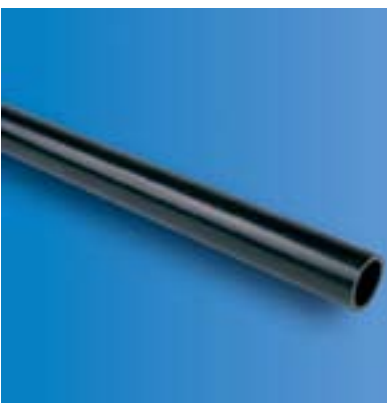

LIGHT GRADE ROUND CONDUIT-320N COMPRESSION FORCE

Item code	Nominal Size	Minimum Inside	Standard packs		Bulk packs
	(O.D.) mm	Diameter mm	Pcs	Mtrs	Pcs
DCL 1	16	13.4	50	145	-
DCL 2	20	17.2	20	58	5000
DCL 3	25	21.7	20	58	3200
DCL 4	32	28.5	10	29	1800
DCL 5	38	34.5	10	29	1300
DCL 6	50	45.6	10	29	720

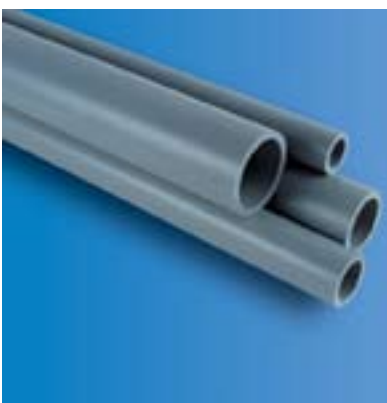

US SCHEDULE 40 CONDUIT

Item code	Trade / Metric	Dimensions (mm)		Standard Packs	
	Sizes Inch/mm	Maximum Outer Diameter	Schedule - 40 Minimum Wall Thickness	Pieces	Metres
DCS4 - 1	1/2" / 16 mm	21.54	2.77	20	60
DCS4 - 2	3/4" / 21 mm	26.92	2.87	10	30
DCS4 - 3	1" / 27 mm	33.66	3.38	10	30
DCS4 - 4	1 1/4" / 35 mm	42.47	3.56	5	15
DCS4 - 5	1 1/2" / 41 mm	48.56	3.68	5	15
DCS4 - 6	2" / 53 mm	60.63	3.91	1	3
DCS4 - 7	3" / 78 mm	89.28	5.49	1	3
DCS4 - 8	4" / 103 mm	115.57	6.02	1	3
DCS4 - 9	6" / 155 mm	169.54	7.11	1	3

• Standard Length of 3 metres in grey colour. Other colours and lengths can be produced upon request.